




Marine Power

Model: 12V-92TA DDEC®
Rating: 815 bhp (608 kW) @ 2100 r/min
 790 shp (589 kW) @ 2100 r/min

Intermittent
 Maximum
 Net Power

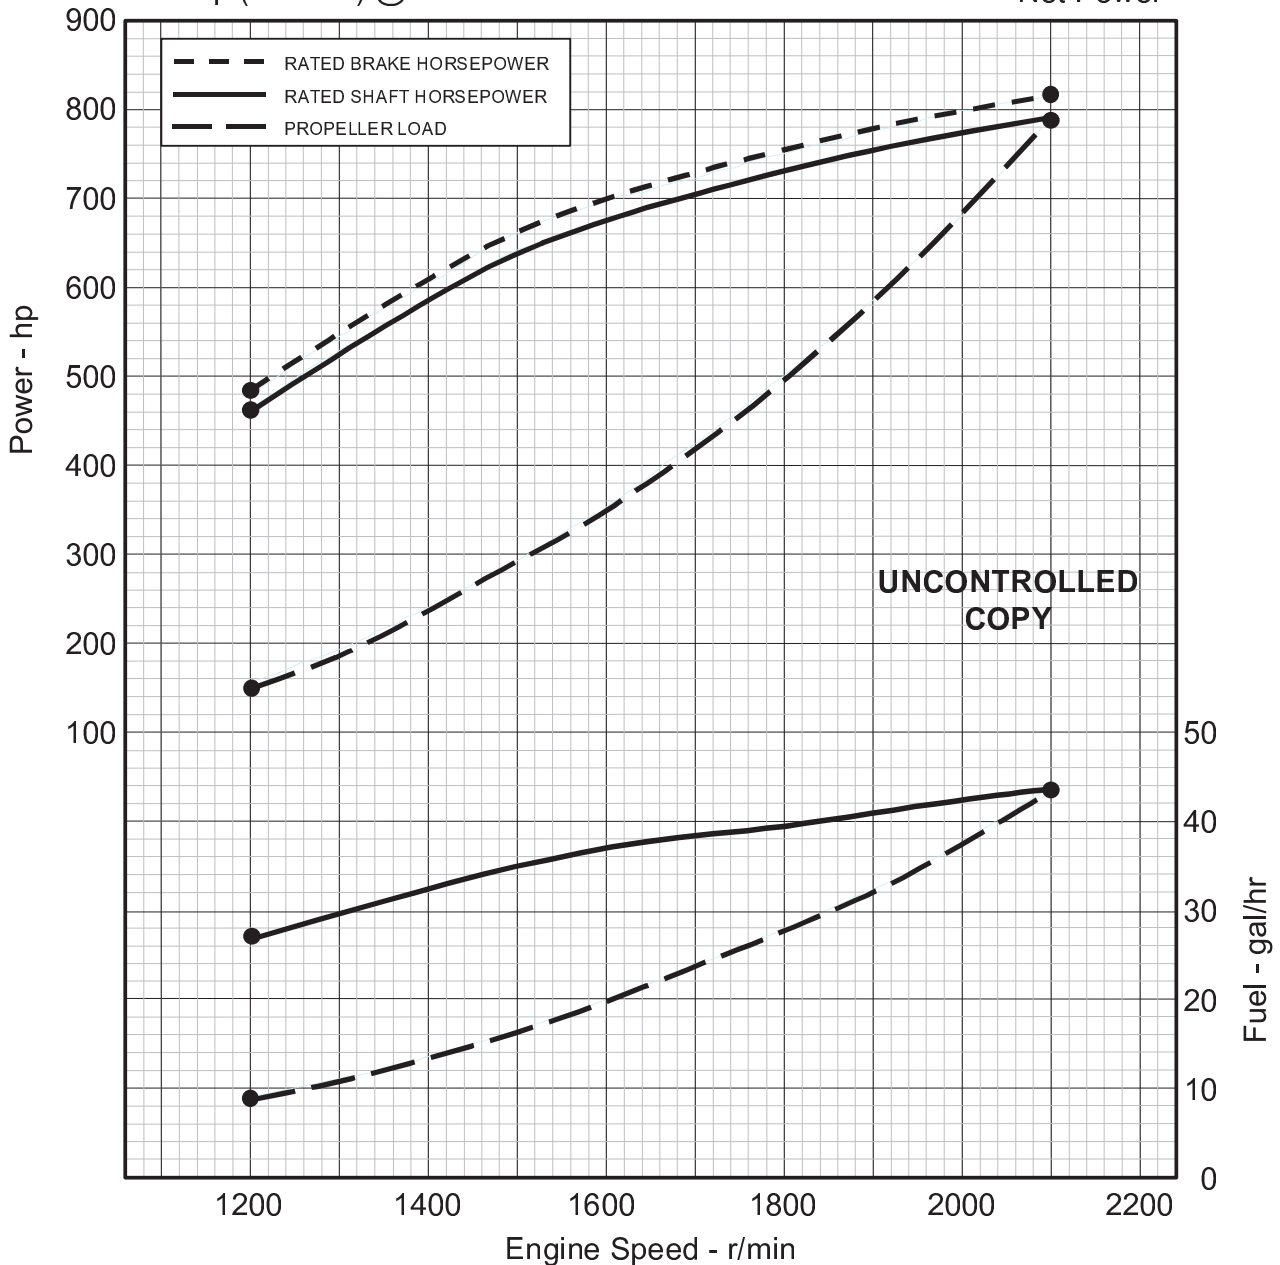

<p>Power output guaranteed within 5% SAE J1228 conditions: 77°F (25°C) air inlet temperature; 29.31 in. Hg (99kPa) dry barometer; 100°F (38°C) fuel inlet temperature; .853 specific gravity at 60°F. Power rated in accordance with NMMA Procedure Air intake restriction: 10 in. H₂O (2.5 kPa) Exhaust Back Pressure: 15 in. H₂O (3.7 kPa)</p>	<p><i>Conversion Factors:</i> Power: kW = bhp x 0.746 Fuel: kg/kW · hr = lb/bhp · hr x 0.608 Torque: N · m = lb · ft x 1.356</p>	<p>Turbo: TW7302 (1.03 A/R) Injector: 5234775 Accessories: DD520-1V Gear Alternator: 24V, 65A Raw Water Pump: Included</p>
---	---	---

Certified by: *JR Hebringer*

Curve No. E4-8122-32-8
Rev. / Date: 3 / 12-23-97
Sheet No. 1 of 2

Performance Curve

MARINE SPECIFICATION SHEET

General Data

Model.....	8122-7K22, -7K23
Number of Cylinders.....	12
Bore and Stroke – in. x in. (mm x mm).....	4.84 x 5.00 (123 x 127)
Displacement – in. ³ (L).....	1104 (18.09)
Compression Ratio.....	17.0:1
Piston Speed – ft/min (m/min).....	1750 (533)
Exhaust Valves.....	4
Combustion System.....	DIRECT INJECTION
Engine Type.....	63.5° VEE 2 Cycle
Aspiration.....	TURBOCHARGED

Configuration

Injection Device.....	EUI
Turbocharger.....	TW7302 (1.03 A/R)
Charge Air Cooling System.....	JWAC
Blower Type.....	100% Bypass
Blower Drive Ratio.....	2.05:1
Low Idle Speed – r/min.....	500
Maximum No Load Speed – r/min.....	2250
Engine Crankcase Vent System.....	Closed

Physical Data

Size:	WITH GEAR	WITHOUT GEAR
Length – in. (mm).....	106.0 (2692)	80.0 (2032)
Width – in. (mm).....	49.7 (1263)	49.7 (1263)
Height – in. (mm).....	64.0 (1625)	64.0 (1625)
Weight, dry – lb (kg).....	7900 (3583)	4900 (2223)
Weight, wet – lb (kg).....	8406 (3813)	5307 (2407)
Center of Gravity Distance:		
From R.F.O.Flg/Blk. (x axis) – in. (mm).....	Not Available	
Above Output Shaft (y axis) – in. (mm).....	Not Available	
Right of Output Shaft (z axis) – in. (mm).....	Not Available	
Installation Drawing.....	23503564 Ref.	

Mechanical Data

E4-8000-32-1

Marine Gear

Type.....	DD520-1V
Reduction Ratio.....	4.0:1
Lube Oil Capacity – qt (L).....	52.8 (50.0)
(marine gear must use straight viscosity oil)	
Gear Weight, Dry – lb (kg).....	3000 (1361)
Center of Gravity Distance:	
From Mounting Face (x axis) – in. (mm).....	14.02 (356)
Above Output Shaft (y axis) – in. (mm).....	5.27 (134)
Right of Output Shaft (z axis) – in. (mm).....	1.98 (50.3)

Fuel System

Fuel Injector – Part Number.....	5234775
Injection Timing Height – in.....	1.520
Fuel Consumption – lb/hr (kg/hr).....	301.7 (136.8)
Fuel Spill Rate gal/hr (L/hr).....	280.0 (1060)
Total Fuel Flow gal/hr (L/hr).....	323.2 (1223)
Maximum Fuel Inlet Temperature – °F (°C).....	140 (60)
Maximum Fuel Pump Suction:	
Clean System – in. Hg (kPa).....	6 (20.3)
Dirty System – in. Hg (kPa).....	12 (41)
Fuel Filter Size, Primary – microns.....	30
Fuel Filter Size, Secondary – microns.....	12
Recommended Supply Line I.D. – in. (mm).....	0.75 (19.05)

Lubrication System

Oil Pressure at Rated Speed – lb/in. ² (kPa).....	49-70 (338-483)
Oil Pressure at Low Idle – lb/in. ² (kPa).....	5.0 (34)
In Pan Oil Temperature – °F (°C).....	200 – 250 (93 – 121)
Oil Flow – gal/min (L/min).....	60 (227)
Oil Pan Capacity at Installation Angle	
High Limit – qt (L).....	42.0 (39.7) 42.0 (39.7)
Low Limit – qt (L).....	34.0 (32.2) 34.0 (32.2)
Total Engine Oil Capacity with Filters – qt (L).....	53.0 (50.2) 53.0 (50.2)
Maximum Installation Angle – Degrees.....	15.0

Electrical System

Recommended Battery Capacity (CCA @ 0°F):	
12 Volt System, Above 32°.....	1900
12 Volt System, Below 32°.....	2500
24 Volt System, Above 32°.....	950
24 Volt System, Below 32°.....	1250
Maximum Resistance of Starting Circuit:	
12 Volt System – ohms.....	0.0012
24 Volt System – ohms.....	0.002

Cooling System

Engine Heat Rejection – Btu/min (kW):.....	37445 (658.4)
Engine Radiated Heat – Btu/min (kW).....	1390 (24.4)
Coolant Flow:	
Fresh Water Flow – gal/min (L/min).....	395 (1495)
Raw Water Flow – gal/min (L/min).....	100 (379)
Maximum Water Pump:	Fresh Water Raw Water
Inlet Restriction – in. Hg (kPa).....	3.0 (10.2) 5.0 (17.0)
Fresh Water Capacity – qt (L).....	145 (137.2)
Maximum Coolant Pressure	
(Exclusive of Pressure Cap) – lb/in. ² (kPa).....	17 (117.2)
Maximum Raw Water Pump Pressure – lb/in. ² (kPa).....	14 (96.5)
Maximum Top Tank Temperature – °F (°C).....	210 (99)
Recommended Raw Water Pipe I.D.	
Inlet – in. (mm).....	4.0 (152)
Outlet – in. (mm).....	3.0 (76)
Recommended Sea Strainer Size:	
(Max. Screen Opening – 2.0 mm)	
Simplex – in. (mm).....	3.0 (76)
Duplex – in. (mm).....	4.0 (102)

Air System

Maximum Temperature Rise	
(Ambient Air to Engine Inlet) – °F (°C).....	30 (16.7)
Maximum Air Intake Restriction:	
Clean Air Cleaner – in. H ₂ O (kPa).....	12 (3.0)
Dirty Air Cleaner – in. H ₂ O (kPa).....	20 (5.0)
Engine Air Flow – ft ³ /min (m ³ /min).....	2030 (57.5)
Air Box Pressure – in. Hg (kPa).....	56.0 (189.1)
Recommended Intake Pipe Outer Diameter:	
Single – in. (mm).....	8.0 (203)
Dual – in. (mm).....	6.0 (152)
Minimum Net Engine Room Vent Area, – in. ² (cm ²).....	195 (1257)
Maximum Crankcase Pressure – in. H ₂ O (kPa).....	3.0 (0.75)

Exhaust System

Exhaust Flow – ft ³ /min (m ³ /min).....	4160 (117.8)
Exhaust Temperature – °F (°C).....	615 (324)
Maximum Back Pressure – in. Hg (kPa).....	2.5 (8.4)
Recommended Exhaust Pipe Diameter:	
Single – in. (mm).....	10.0 (254) 12.0 (305)
Dual – in. (mm).....	8.0 (203) 10.0 (254)

Performance Data

BMEP – lb/in. ² (kPa).....	139.2 (960)
Friction Power – fhp (kW).....	158 (118)

Engine Speed	Brake Power	Shaft Power	Rated Fuel Usage	Rated BSFC
r/min	bhp (kW)	shp (kW)	gal/hr (L/hr)	lb/bhp-hr (g/kW-hr)
2100	815 (608)	790 (589)	43.2 (163.4)	0.370 (225)
1950	788 (588)	764 (570)	41.3 (156.3)	0.366 (223)
1800	752 (561)	729 (544)	39.1 (148.1)	0.364 (221)
1600	696 (519)	674 (503)	36.5 (138.1)	0.366 (223)
1400	605 (451)	586 (437)	32.3 (122.4)	0.373 (227)
1200	480 (358)	464 (346)	26.8 (101.5)	0.390 (237)

Engine Speed	Prop Load	Prop Fuel Usage	Prop BSFC
r/min	shp (kW)	gal/hr (L/hr)	lb/bhp-hr (g/kW-hr)
2100	790 (589)	43.2 (163.4)	0.370 (225)
1950	633 (472)	34.2 (129.6)	0.366 (223)
1800	497 (371)	27.6 (104.3)	0.374 (227)
1600	349 (261)	19.8 (75.0)	0.381 (232)
1400	234 (175)	13.5 (51.2)	0.386 (235)
1200	147 (110)	9.1 (34.3)	0.406 (247)

Emissions Data

Smoke, Rated Speed – Bosch Number.....	2.2
Noise – dB(A) @ 1.....	103.0
Additional Noise Data.....	Not Available
NO _x – g/hr.....	5875
CO – g/hr.....	4330
HC – gh/r.....	123
SO ₂ – g/hr.....	1368

**UNCONTROLLED
COPY**

All values are at rated speed and power at SAE J1228 with standard engine hardware, unless otherwise noted.

Curve No. E4-8122-32-8
Rev. / Date: 3 / 12-23-97
Sheet No. 2 of 2