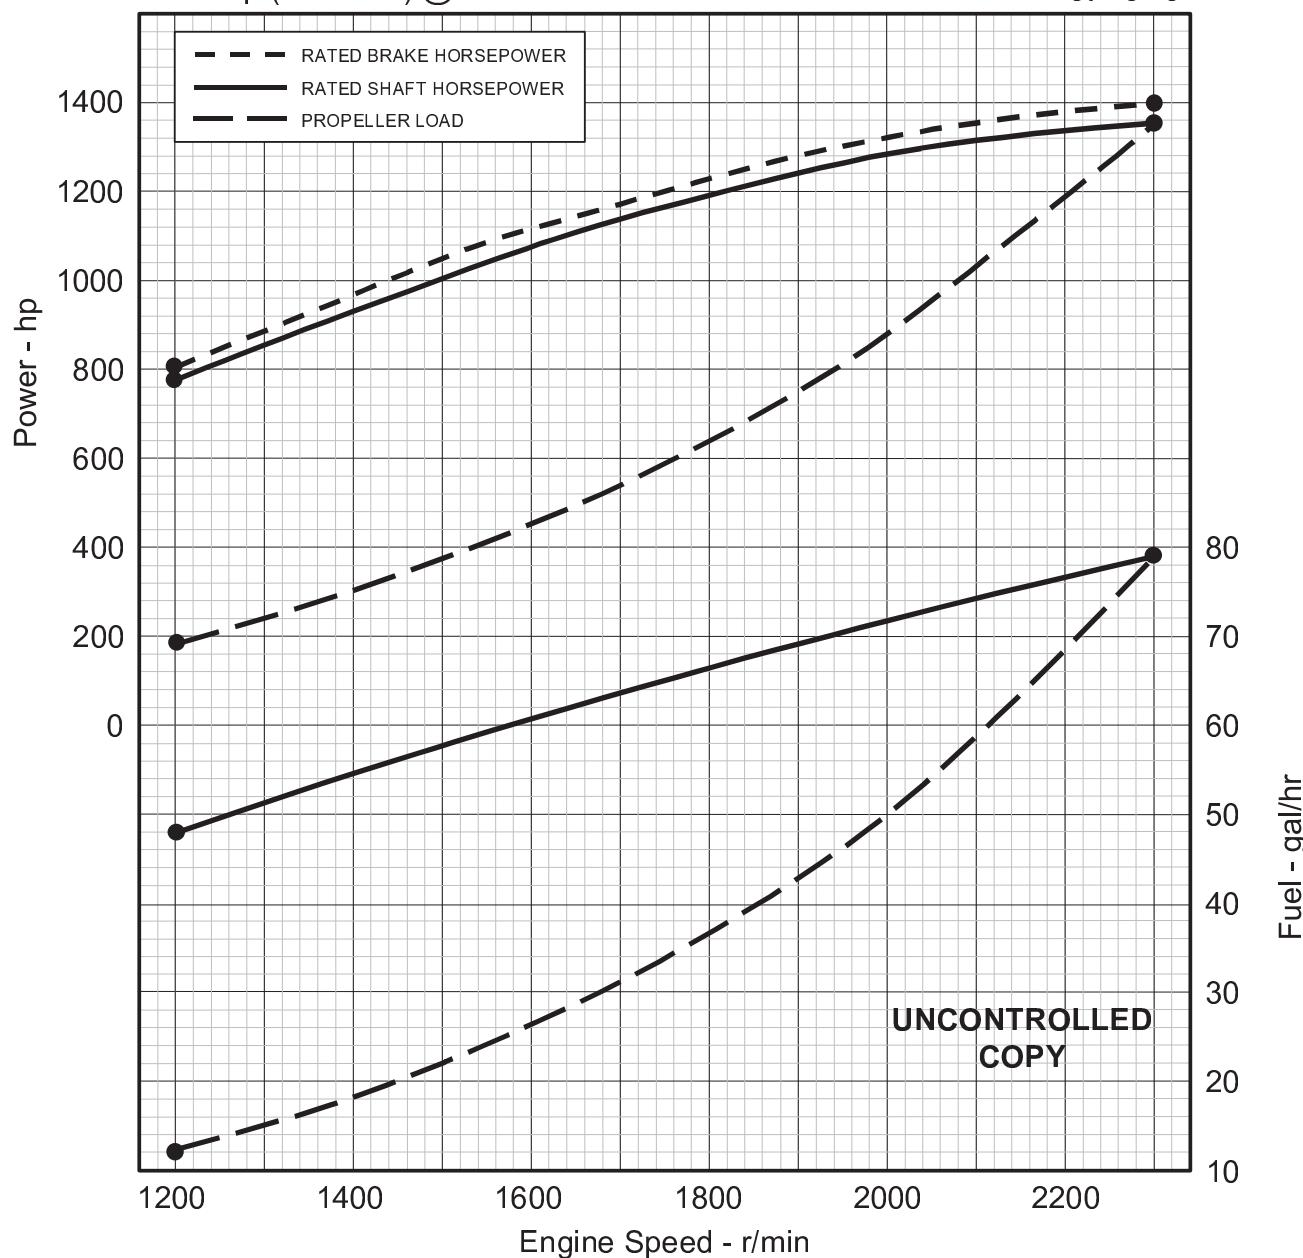


DETROIT DIESEL**Marine Power**

Model: 16V-92TA

Rating: 1400 bhp (1044 kW) @ 2300 r/min
1350 shp (1007 kW) @ 2300 r/minMaximum
Net Power

Power output guaranteed within 5% SAE J1228 conditions:
77°F (25°C) air inlet temperature; 29.31 in. Hg (99kPa) dry barometer;
100°F (38°C) fuel inlet temperature; .853 specific gravity at 60°F.
Power rated in accordance with NMMA Procedure
Air intake restriction: 10 in. H₂O (2.5 kPa)
Exhaust Back Pressure: 15 in. H₂O (3.7 kPa)

Conversion Factors:
Power: kW = bhp x 0.746
Fuel: kg/kW · hr = lb/bhp · hr x 0.608
Torque: N · m = lb · ft x 1.356

Turbo: TW9401 (1.46 A/R)
Injector: 7125
Accessories: DD272EV Gear
Alternator: 24V, 65A
Raw Water Pump: 2 Included

Certified by:

Curve No. E4-8162-32-2
Rev. / Date: 10 / 1-7-99
Sheet No. 1 of 2

Performance Curve

Marine Specification Sheet

General Data

Model.....	8162-7400
Number of Cylinders.....	16
Bore and Stroke – in. x in. (mm x mm).....	4.84 x 5.00 (123 x 127)
Displacement – in. ³ (L).....	1472 (24.14)
Compression Ratio.....	17.0:1
Piston Speed – ft/min (m/min).....	1917 (584)
Exhaust Valves.....	4
Combustion System.....	Direct Injection
Engine Type	63.5° VEE 2 Cycle
Aspiration.....	Turbocharged

Configuration

Injection Device	MUI
Turbocharger	TW9401 (1.46 A/R)
Charge Air Cooling System.....	JWAC with Boost Cooler
Blower Type.....	100% Relieved Bypass
Blower Drive Ratio.....	2.60:1
Low Idle Speed – r/min.....	550
Maximum No Load Speed – r/min.....	2500
Engine Crankcase Vent System	closed

Physical Data

	WITH GEAR	WITHOUT GEAR
Size:		
Length – in. (mm).....	103.9 (2639)	81.1 (2060)
Width – in. (mm).....	49.1 (1247)	49.1 (1247)
Height – in. (mm).....	54.0 (1372)	53.9 (1369)
Weight, Dry – lb (kg)	6896 (3128)	5970 (2708)
Weight, Wet – lb (kg)	7345 (3332)	6388 (2898)
Center of Gravity Distance:		
From R.F.O.B. (x axis) – in. (mm)	50.9 (1293)	27.3 (693)
Above Output Shaft (y axis) – in. (mm)	15.7 (399)	8.6 (218)
Right of Output Shaft (z axis) – in. (mm)	-1.03 (-26.2)	0.8 (20.3)
Installation Drawing	23503599	Reference

Mechanical Data

Marine Gear

Type.....	DD-272EV
Reduction Ratio	2.04:1
Lube Oil Capacity– qt (L)	16.9 (16.0)
(marine gear must use straight viscosity oil)	

Gear Weight, Dry – lb (kg)	926 (420)
----------------------------------	-----------

Center of Gravity Distance:

From Mounting Face (x axis) – in. (mm).....	11.97 (304)
Above Output Shaft (y axis) – in. (mm)	5.20 (132)
Right of Output Shaft (z axis) – in. (mm)	2.56 (65)

Fuel System

Fuel Injector.....	7125
Injector Timing	1.508
Fuel Consumption – lb/hr (kg/hr).....	549.5 (249.2)
Fuel Spill Rate gal/hr (L/hr)	109 (413)
Total Fuel Flow gal/hr (L/hr)	186.6 (706.4)
Maximum Fuel Inlet Temperature – °F (°C)	140 (60)
Maximum Fuel Pump Suction:	
Clean System – in. Hg (kPa)	6 (20.3)
Dirty System – in. Hg (kPa)	12 (41)
Fuel Filter Size, Primary – microns	30
Fuel Filter Size, Secondary – microns	12
Recommended Supply Line I.D. – in. (mm)	0.75 (19.1)

Lubrication System

Oil Pressure at Rated Speed – lb/in. ² (kPa).....	49-70 (338-483)
Oil Pressure at Low Idle – lb/in. ² (kPa)	5.0 (34)
In Pan Oil Temperature – °F (°C)	200 – 250 (93 – 121)
Oil Flow – gal/min (L/min)	85 (322)
Oil Pan Capacity at Installation Angle	
High Limit – qt (L).....	65.0 (62.0) 54.5 (51.6)
Low Limit – qt (L)	53.0 (50.0) 42.6 (40.3)
Total Engine Oil Capacity with Filters – qt (L)	67.0 (64.0) 54.5 (51.6)
Maximum Installation Angle – Degrees.....	10.0

Electrical System

Recommended Battery Capacity (CCA @ 0°F):	
24 Volt System, Above 32°	950/Starter
24 Volt System, Below 32°	1250/Starter
Maximum Resistance of Starting Circuit:	

24 Volt System – ohms.....	0.002
----------------------------	-------

All values are at rated speed and power at SAE J1228 with standard engine hardware, unless otherwise noted.

Cooling System

Engine Heat Rejection – Btu/min (kW):	52700 (926.7)
Boost Cooler Heat Rejection – Btu/min (kW):	11540 (202.9)
Engine Radiated Heat – Btu/min (kW)	2525 (44.4)
Coolant Flow:	
Fresh Water Flow – gal/min (L/min)	357 (1351)
Raw Water Flow – gal/min (L/min)	214 (810)
Maximum Water Pump:	
Inlet Restriction – in. Hg (kPa)	3.0 (10.2) 5.0 (17.0)
Fresh Water Capacity – qt (L)	138 (130.6)

Maximum Coolant Pressure	
(Exclusive of Pressure Cap) – lb/in. ² (kPa)	17.5 (121)
Maximum Raw Water Pump Pressure – lb/in. ² (kPa)	14 (97)
Maximum Top Tank Temperature – °F (°C)	210 (99)
Recommended Raw Water Pipe I.D.	
Inlet – in. (mm)	4.0 (152)
Outlet – in. (mm)	3.0 (76)

Recommended Sea Strainer Size:	
(Max. Screen Opening – 2.0 mm)	
Simplex – in. (mm)	3.0 (76)
Duplex – in. (mm)	4.0 (102)

Air System

Maximum Temperature Rise	
(Ambient Air to Engine Inlet) – °F (°C)	30 (16.7)
Maximum Air Intake Restriction:	
Clean Air Cleaner – in. H ₂ O (kPa)	12 (3.0)
Dirty Air Cleaner – in. H ₂ O (kPa)	15 (3.7)
Engine Air Flow – ft ³ /min (m ³ /min)	3900 (110.4)
Air Box Pressure – in. Hg (kPa)	61.0 (206.0)
Recommended Intake Pipe Dia. – in. (mm)	10.0 (254)
Minimum Net Engine Room Vent Area, – in. ² (cm ²)	374 (2415)
Maximum Crankcase Pressure – in. H ₂ O (kPa)	2.5 (0.62)

Exhaust System

Exhaust Flow – ft ³ /min (m ³ /min)	7990 (226.3)
Exhaust Temperature – °F (°C)	640 (338)
Maximum Back Pressure – in. Hg (kPa)	2.5 (8.4)
Recommended Exhaust Pipe Diameter:	
Dry Single – in. (mm)	10.0 (254)
Wet Dual – in. (mm)	8.0 (203) 10.0 (254)

Performance Data

BMEP – lb/in. ² (kPa)	163.7 (1129)
Friction Power– hp (kW)	250 (187)

Engine Speed r/min	Brake Power bhp (kW)	Shaft Power shp (kW)	Rated Fuel Usage gal/hr (L/hr)	Rated BSFC lb/bhp-hr (g/kW·hr)
2300	1400 (1044)	1350 (1007)	78.6 (297.7)	0.392 (239)
2100	1361 (1015)	1313 (979)	74.0 (280.3)	0.380 (231)
1950	1306 (974)	1260 (940)	70.3 (266.1)	0.376 (229)
1800	1235 (921)	1191 (889)	66.5 (251.7)	0.376 (229)
1500	1043 (778)	1006 (750)	57.9 (219.2)	0.388 (236)
1200	809 (604)	779 (581)	48.1 (182.2)	0.416 (253)

Engine Speed r/min	Prop Load shp (kW)	Prop Fuel Usage gal/hr (L/hr)	Prop BSFC lb/bhp-hr (g/kW·hr)
2300	1350 (1007)	78.6 (297.7)	0.392 (239)
2100	1028 (767)	58.1 (219.9)	0.380 (231)
1950	823 (614)	46.2 (175.0)	0.378 (230)
1800	647 (483)	36.4 (137.6)	0.377 (229)
1500	374 (279)	21.8 (82.6)	0.388 (236)
1200	192 (143)	12.2 (46.0)	0.416 (253)

Emissions Data

Smoke, Rated Speed – Bosch Number	1.2
Noise – dB(A) @ 1	105.8
Additional Noise Data	Not Available
NO _x – g/hr	9850
CO – g/hr	6180
HC – gh/r	340
SO ₂ – g/hr	2490

UNCONTROLLED COPY

Curve No. E4-8162-32-2
 Rev. / Date: 10 / 1-7-99
 Sheet No. 2 of 2

All information subject to change without notice.
 Detroit Diesel and Spinning Arrows Design® are registered trademarks of Detroit Diesel Corporation.
 © 1999 DETROIT DIESEL CORPORATION