




Marine Power

Model: 8V-149TI DDEC®

Rating: 800 bhp (597 kW) @ 1800 r/min
773 shp (577 kW) @ 1800 r/min

Continuous
Net Power

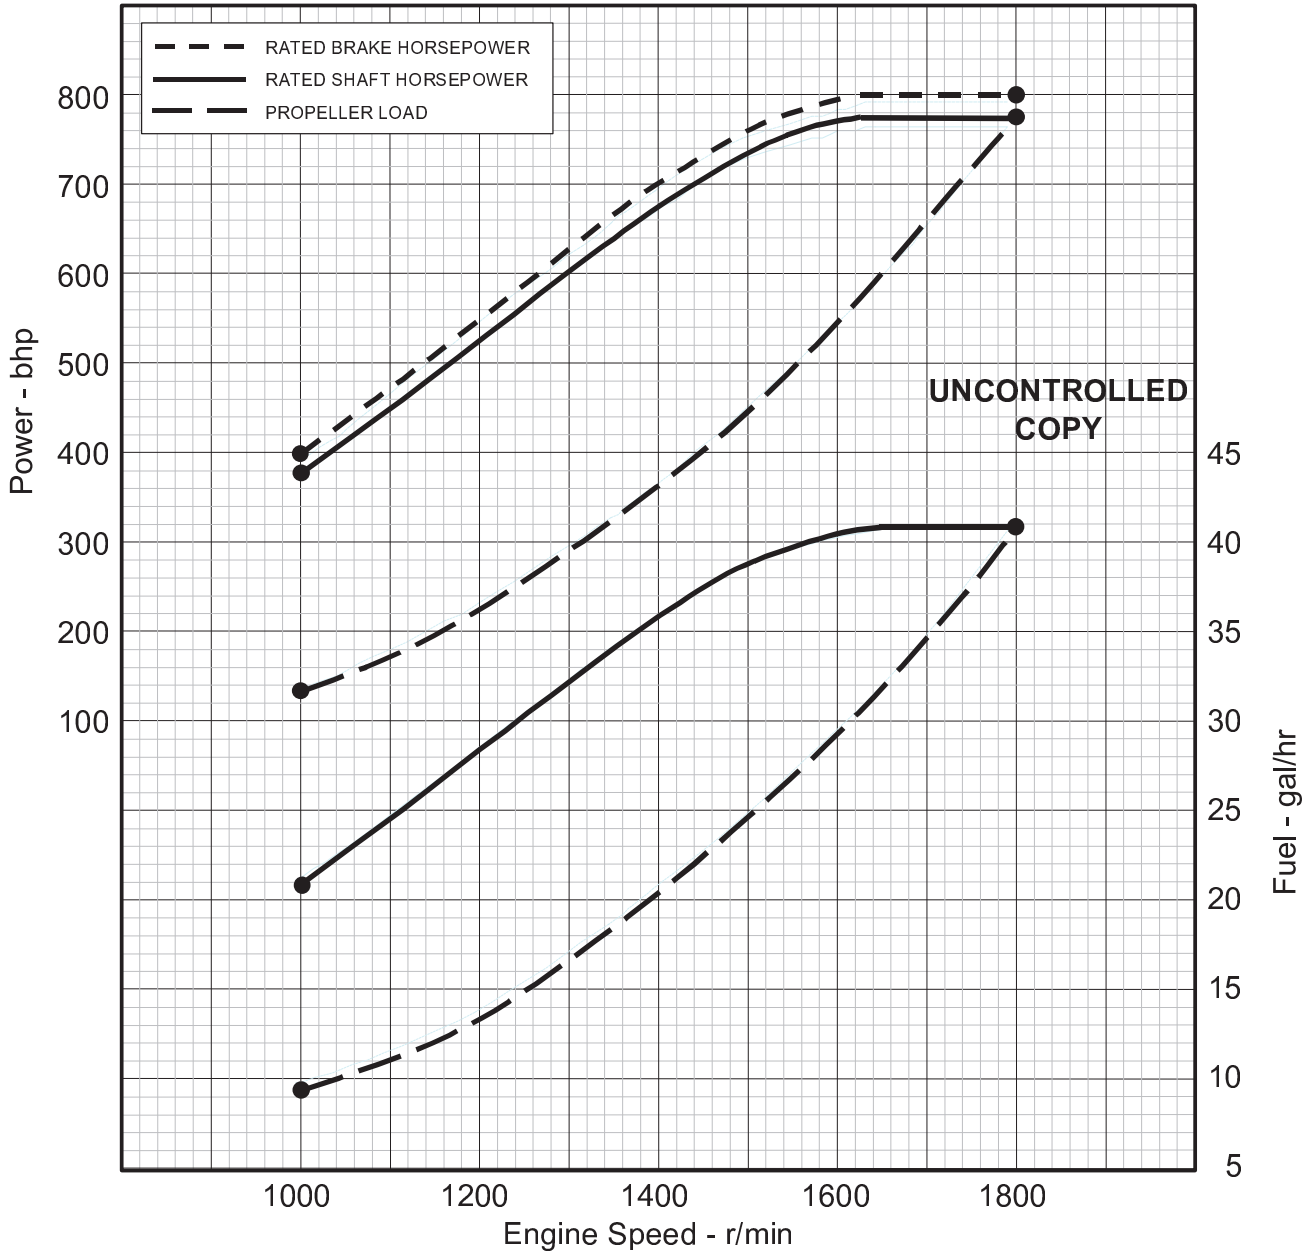

<p>Power output guaranteed within 5% SAE J1228 conditions: 77°F (25°C) air inlet temperature; 29.31 in. Hg (99kPa) dry barometer; 100°F (38°C) fuel inlet temperature; .853 specific gravity at 60°F. Power rated in accordance with NMMA Procedure Air intake restriction: 10 in. H₂O (2.5 kPa) Exhaust Back Pressure: 15 in. H₂O (3.7 kPa)</p>	<p><i>Conversion Factors:</i> Power: kW = hp x 0.746 Fuel: L/hr = gal/hr x 3.785</p>	<p>Turbo: TV8405 (1.23 A/R) Injector: 5234920 Accessories: DD-520 Gear Alternator: 24V, 70A Raw Water Pump: Included</p>
--	--	---

Certified by: *Caley Edgerly*

Curve No. E4-9082-32-9
Rev. / Date: 2 / 12-23-97
Sheet No. 1 of 2

Performance Curve

MARINE SPECIFICATION SHEET

General Data

Model	9082-7K22,-7K23
Number of Cylinders	8
Bore and Stroke – in. x in. (mm x mm)	5.75 x 5.75 (146 x 146)
Displacement – in. ³ (L)	1195 (19.6)
Compression Ratio	14.0:1
Piston Speed – ft/min (m/min)	1725 (526)
Exhaust Valves	4
Combustion System	DIRECT INJECTION
Engine Type	63.5° VEE – 2 Cycle
Aspiration	TURBOCHARGED

Configuration

Injection Device	EUI
Turbocharger	TV8403 (1.23 A/R)
Charge Air Cooling System	JWIC
Blower Type	Standard (Ext. Bypass)
Blower Drive Ratio	2.26:1
Low Idle Speed – r/min	650
Maximum No Load Speed – r/min	1810
Engine Crankcase Vent System	Closed

Physical Data

Size:	WITH GEAR	WITHOUT GEAR
Length – in. (mm)	64.0 (1625)	64.0 (1625)
Width – in. (mm)	68.0 (1727)	68.0 (1727)
Height – in. (mm)	6000 (2727)	6000 (2727)
Weight, dry – lb (kg)	6400 (2909)	6400 (2909)
Weight, wet – lb (kg)		
Center of Gravity Distance:		
From R.F.O.B. (x axis) – in. (mm)	18.7 (475.5)	
Above Crankshaft (y axis) – in. (mm)	14.5 (367.3)	
Right of Crankshaft (z axis) – in. (mm)	0.9 (22.9)	
Installation Drawing	23502703 Ref.	
Mechanical Data	E4-9000-32-2	

Marine Gear

Type	Not Available
Reduction Ratio	Not Available
Lube Oil Capacity – qt (L)	Not Available
(marine gear must use straight viscosity oil)	
Gear Weight, dry – lb (kg)	Not Available
Center of Gravity Distance:	
From Mounting Face (x axis) – in. (mm)	Not Available
Above Output Shaft (y axis) – in. (mm)	Not Available
Right of Output Shaft (z axis) – in. (mm)	Not Available

Fuel System

Fuel Injector Part Number	5234920
Injector Timing – in.	2.524
Fuel Consumption – lb/hr (kg/hr)	284.9 (129.2)
Fuel Spill Rate gal/hr (L/hr)	309.2 (1171)
Total Fuel Flow gal/hr (L/hr)	350 (1324.9)
Maximum Fuel Inlet Temperature – °F (°C)	140 (60)
Maximum Fuel Pump Suction:	
Clean System – in. Hg (kPa)	6 (20.3)
Dirty System – in. Hg (kPa)	12 (41)
Fuel Filter Size, Primary – microns	30
Fuel Filter Size, Secondary – microns	5
Recommended Supply Line I.D. – in. (mm)	1.0 (25.4)

Lubrication System

Oil Pressure at Rated Speed – lb/in. ² (kPa)	65-85 (448-586)
Oil Pressure at Low Idle – lb/in. ² (kPa)	10 (69)
In Pan Oil Temperature – °F (°C)	200 – 250 (93 – 121)
Oil Flow – gal/min (L/min)	120 (454)
Oil Pan Capacity at Installation Angle	
High Limit – qt (L)	104 (98.4) 104 (98.4)
Low Limit – qt (L)	87 (82.3) 87 (82.3)
Total Engine Oil Capacity with Filters – qt (L)	200 (189.3) 200 (189.3)
Maximum Installation Angle – Degrees	12.0

Electrical System

Recommended Battery Capacity (CCA @ 0°F):	
24 Volt System, Above 32°	950/Starter
24 Volt System, Below 32°	1250/Starter
Maximum Resistance of Starting Circuit:	
24 Volt System – ohms	0.002/Starter

Cooling System

Engine Heat Rejection – Btu/min (kW)	27870 (488)
Engine Radiated Heat – Btu/min (kW)	3100 (55)
Coolant Flow:	
Fresh Water Flow – gal/min (L/min)	265 (1003)
Raw Water Flow – gal/min (L/min)	
Maximum Water Pump:	
Inlet Restriction – in. Hg (kPa)	3.0 (10.2) 5.0 (17.0)
Fresh Water Capacity – qt (L)	91 (86.1)
Maximum Coolant Pressure	
(Exclusive of Pressure Cap) – lb/in. ² (kPa)	30 (204)
Maximum Raw Water Pump Pressure – lb/in. ² (kPa)	14 (97)
Maximum Top Tank Temperature – °F (°C)	200 (93)
Recommended Raw Water Pipe I.D.	
Inlet – in. (mm)	4.0 (152)
Outlet – in. (mm)	3.0 (76)
Recommended Sea Strainer Size:	
(Max. Screen Opening – 2.0 mm)	
Simplex – in. (mm)	3.0 (76)
Duplex – in. (mm)	4.0 (102)

Air System

Maximum Temperature Rise	
(Ambient Air to Engine Inlet) – °F (°C)	30 (16.7)
Maximum Air Intake Restriction:	
Clean Air Cleaner – in. H ₂ O (kPa)	12 (3.0)
Dirty Air Cleaner – in. H ₂ O (kPa)	15 (3.73)
Engine Air Flow – ft ³ /min (m ³ /min)	2600 (74)
Air Box Pressure – in. Hg (kPa)	52.2 (176.3)
Recommended Intake Pipe Dia. – in. (mm)	10.0 (254)
Minimum Net Engine Room Vent Area, – in. ² (cm ²)	250 (1612)
Maximum Crankcase Pressure – in. H ₂ O (kPa)	2.5 (0.62)

Exhaust System

Exhaust Flow – ft ³ /min (m ³ /min)	5550 (157)
Exhaust Temperature – °F (°C)	700 (371)
Maximum Back Pressure – in. Hg (kPa)	2.5 (8.5)
Recommended Exhaust Pipe Diameter:	
Single – in. (mm)	12 (305) 14 (356)
Dual – in. (mm)	8.0 (203) 10 (25.4)

Performance Data

BMEP – lb/in. ² (kPa)	147 (1013)
Friction Power – fhp (kW)	180 (134)

Engine Speed r/min	Brake Power bhp (kW)	Shaft Power shp (kW)	Rated Fuel Usage gal/hr (L/hr)	Rated BSFC lb/bhp-hr (g/kW-hr)
1800	800 (597)	773 (577)	40.8 (154.4)	0.356 (217)
1600	790 (589)	764 (570)	40.1 (151.8)	0.355 (216)
1400	699 (521)	676 (504)	35.6 (134.6)	0.355 (216)
1200	550 (410)	531 (396)	28.1 (106.4)	0.357 (217)
1000	395 (295)	381 (284)	20.8 (78.8)	0.368 (224)

Engine Speed r/min	Prop Load shp (kW)	Prop Fuel Usage gal/hr (L/hr)	Prop BSFC lb/bhp-hr (g/kW-hr)
1800	773 (577)	40.8 (154.4)	0.356 (217)
1600	543 (405)	29.0 (109.7)	0.360 (219)
1400	364 (271)	20.3 (76.7)	0.375 (228)
1200	229 (171)	13.3 (50.4)	0.390 (237)
1000	133 (99)	9.3 (35.2)	0.469 (286)

Emissions Data

Smoke, Rated Speed – Bosch Number	0.2
Noise – dB(A) @ 1	105.6
Additional Noise Data	Not Available
NO _x – g/hr	12800
CO – g/hr	770
HC – gh/r	370
SO ₂ – g/hr	1290

**UNCONTROLLED
COPY**

Curve No. E4-9082-32-9
Rev. / Date: 2 / 12-23-97
Sheet No. 2 of 2

All values are at rated speed and power at SAE J1228 with standard engine hardware, unless otherwise noted.

All information subject to change without notice.
Detroit Diesel and Spinning Arrows Design® are registered trademarks of Detroit Diesel Corporation.
© 1997 DETROIT DIESEL CORPORATION